

03/09/98  
JC535 U.S. PTO

101/790.00  
102/328.00  
103/220.00

A

REV 98-5

Applicants: Schoon, et al.

Serial No: To Be Assigned

Filing Date: To Be Assigned

For: ARTIFICIAL NAIL COMPOSITIONS AND RELATED METHODS

TRANSMITTAL OF PATENT APPLICATION

Hon. Commissioner of Patents and Trademarks  
Box Patent Application  
Washington, D.C. 20231

Dear Sir:

This is a request for the filing of a patent application.


The Commissioner is hereby authorized to charge the filing fee of \$790.00 to our Deposit Account No. 18-1065, and an additional fee of \$328.00, for presentation of four additional independent claims in excess of three, plus an additional fee of \$220.00, for presentation of ten extra claims in addition to twenty; for a total of \$1338.00.

The Commissioner is hereby authorized to charge the following fees and to credit overpayment to Deposit Account 18-1065:

- fees for additional claims under 37 CFR 1.16;
- patent application processing fees under 37 CFR 1.17

Please direct all correspondence and telephone calls to:

Julie Blackburn  
Reg. No. 32370  
Revlon Consumer Products Corporation  
625 Madison Avenue  
New York, New York 10022  
(212) 527-5531

  
Julie Blackburn

## ARTIFICIAL NAIL COMPOSITIONS AND RELATED METHODS

### Technical Field

The invention is in the field of compositions for application to nails which polymerize on the nail surface to yield an artificial nail structure and the resulting polymerized artificial nail structure, as well as a method for improving adhesion of the artificial nail to the nail surface, and a method for reducing delamination of the laminate formed when the artificial nail is adhered to the nail surface, and a method for reducing premature gelation of monomer compositions used to make artificial nails.

### Background of the Invention

Artificial nails are widely used by women who desire to have long, attractive fingernails which do not break or chip as readily as natural nails. Artificial nails are generally formed directly on the natural nail surface by coating on the nail a layer of a viscous liquid monomer composition comprised of one or more addition polymerizable, ethylenically unsaturated monomers, shaping the material to the desired configuration, then allowing the material to polymerize on the nail surface to yield a hard coating. The resulting artificial nail is then shaped and polished to look like a natural nail. Often the monomer composition comprises one or more esters of acrylic or methacrylic acid and an aliphatic alcohol or ether alcohol, e.g. ethyl acrylate or tetraethylene glycol di-methacrylate.

The preparation and application of artificial nails requires a certain level of skill. In addition, the monomer composition must exhibit certain properties which enable easy application and polymerization of the composition on the nails, while at the same time providing a

polymerized nail structure which is strong, yet flexible. Important properties of the monomer composition are gel time, set time, and flexibility. In other words, the monomer composition must reach a certain viscosity in a certain period of time after polymerization is initiated.

Otherwise precious minutes are wasted waiting for polymerization to occur, or if the applied monomer composition is not viscous enough when applied to the nail, it will drip off the nail surface and will be difficult to shape. Once the monomer composition is applied to the nails it must set, or polymerize, in a period of time which is adequate to permit a skilled nail technician to apply and shape the composition, but not so long as to have the client waiting for excess periods of time. The monomer composition must be flexible enough so that the nail technician can shape it into the desired configuration prior to setting. The hardened nail structure must be flexible and strong. Flexibility means that the nail can withstand certain amounts of stress without breaking. Too little flexibility causes brittleness and easy breakage. On the other hand, too much flexibility causes reduced strength. Thus, it is important to have a balance between flexibility and strength.

Further, the polymerized artificial nail structure must exhibit adequate adhesion to the nail surface, otherwise it will become dislodged too easily. Generally, artificial nails do not adhere well to nail surfaces. Thus, it is necessary to first coat the nail surface with a primer composition, which is most often acrylic or methacrylic acid alone or in a solvent composition. The primer promotes adhesion of the subsequently applied artificial nail to the nail surface. Obviously, it would be desirable to eliminate use of the primer composition, without lowering adhesion of the artificial nail structure to the nail surface.

Another consistent problem with artificial nails is known as “curling”, or more technically described as “delamination”. This results when the natural nail surface curves away from the artificial nail as the natural nail grows. This delamination provides crevices between the two surfaces, which tend to collect dirt and bacteria. Delamination is a major cause of infection for those who wear artificial nails. Also, delamination causes discomfort and poor hygiene.

In addition, another problem for manufacturers of artificial nail compositions is polymerization of the monomer composition in the container in which it is sold. This is referred to as “premature gelation” or “premature polymerization”. Obviously, product which is polymerized at the time it is received by the nail salon is not suitable for use and is returned to the manufacturer. In some cases, product may be received in the salon which is close to premature polymerization. The salon owner, not realizing this, uses the product to prepare artificial nails. The resulting artificial nails are often deficient in adhesion and strength.

There is a need to improve the gel time, set time, flexibility, strength, adhesion, and other characteristics of artificial nails, as well as to reduce premature gelation and delamination or curling.

It is an object of the invention to provide an artificial nail monomer composition which exhibits improved gel time, set time, and flexibility.

It is an object of the invention to provide a polymerized artificial nail structure which exhibits improved strength, flexibility, and adhesion to the nail.

It is an object of the invention to provide a method for improving adhesion of an artificial nail structure to the nail surface, without the necessity of treating the nail surface with a primer composition.

5 It is an object of the invention to provide an artificial nail composition which exhibits a reduced tendency toward premature gelation.

It is an object of the invention to provide a method for reducing delamination of the artificial and natural nail surface, or the curling of the natural nail away from the artificial nail structure.

#### Summary of the Invention

10 It has been found that the above stated objectives can be realized in a liquid, artificial nail composition comprised of one or more other addition-polymerizable, ethylenically unsaturated monomers, by also including in the composition a monoethylenically unsaturated vinyl monomer that contains two or more carbonyl groups (hereinafter referred to as a "multicarbonyl vinyl-containing monomer").

15 The invention also comprises a polymerized artificial nail structure having a thickness of about 10-60 mils, and a modulus of elasticity of about 550-800 N/m<sup>2</sup>, comprising a copolymer of at least one ethylenically unsaturated monomer and a multicarbonyl vinyl-containing monomer.

The invention comprises a method for reducing, ameliorating, or eliminating delamination of an artificial nail structure from the natural nail surface, wherein said artificial  
20 nail structure is obtained by polymerizing on the natural nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

The invention comprises a method for improving adhesion of an artificial nail structure to the nail surface, wherein the artificial nail structure has been applied by polymerizing on the nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

The invention comprises a method for reducing premature gelation of a liquid monomer composition containing at least one other ethylenically unsaturated monomer, comprising adding to said composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

#### Detailed Description

All parts and percentages mentioned herein are parts and percentages by weight unless otherwise indicated.

The term “nail surface” means the natural nail surface, or a natural nail to which a pre-formed artificial nail or nail tip is adhered. In other words, the polymerizable compositions of the invention may be applied directly to the keratinous surface of the natural nail, or to a nail surface having affixed thereto a pre-formed artificial nail or nail tip enhancement.

The term “mil” means thousandths of an inch.

The term “polymerizable” means that the composition polymerizes on the nail surface upon exposure to appropriate chemicals, heat, light (such as visible or ultraviolet light), or other types of stimuli. The polymerization may occur by free radical or cationic mechanisms.

“Tangent modulus of elasticity”, or “modulus of elasticity” means the ratio, within the elastic limit of stress to corresponding strain. The modulus of elasticity is determined using ASTM test method D 790-86, which is entitled “Standard Test Method For Flexural Properties of

Unreinforced and Reinforced Plastics and Electrical Insulating Materials”, and then calculated by drawing a tangent to the steepest initial straight line portion of the load deflection curve and using the following formula to calculate the value in Newtons per square meter (N/m<sup>2</sup>) (or pounds per square inch):

5             $E_B = L^3 m / 4bd^3$

where:

$E_B$  = modulus of elasticity in bending, N/m<sup>2</sup> (or psi)

$L$  = support span, in meters (inches)

$b$  = width of beam tested, in meters (inches)

10         $d$  = depth of beam tested, in meters (inches)

$m$  = slope of the tangent to the initial straight-line portion of the load deflection curve, N/m (lbf/in) of deflection.


### THE POLYMERIZABLE COMPOSITION

15        The invention comprises a polymerizable monomer composition for application to the nails and polymerization thereon to yield an artificial nail structure. The polymerizable composition is preferably an anhydrous liquid, having the consistency of a semi-mobile gel to freely mobile liquid at room temperature. Immediately prior to use, the polymerizable composition is applied to the nail surface and shaped by the nail technician. After  
20        polymerization an artificial nail structure is obtained, which is then shaped and polished. The polymerizable composition of the invention contains at least one multicarbonyl-vinyl containing monomer.

#### The Multicarbonyl-Vinyl Containing Monomer


25        The composition contains at least one multicarbonyl-vinyl containing monomer, preferably in the range of about 0.1-98.5%, more preferably 0.5-95%, most preferably 1-15%.

The multicarbonyl-vinyl containing monomer includes those having the following general formula:





wherein  $\text{R}_3$  is H, a  $\text{C}_{1-30}$  straight or branched chain alkyl, aryl, aralkyl; and

$\text{R}_4$  is  $-\text{A}-\text{X}-\text{OC}(\text{CH}_2)_m\text{C}(\text{CH}_2)_n\text{Z}$ , or



wherein  $\text{A} = -\text{C}(\text{O})-\text{O}-$ , or  $\text{O}-\text{C}(\text{O})-$ ,  $\text{X} = \text{C}_{1-30}$  straight or branched chain alkyl,  $m$  is 1 to 5,  $n$  is 1 to 30,  $y$  is 0 to 50; and  $\text{Z} = \text{H}$  or a  $\text{C}_{1-30}$  straight or branched chain alkyl.

Preferably  $\text{R}_3$  is hydrogen or a  $\text{C}_{1-8}$  alkyl, preferably methyl, and  $\text{R}_4$  is



$\text{X} = \text{C}_{1-5}$  alkylene



m = 1-5,

n = 1-5, and

Z = C<sub>1-10</sub> straight chain alkyl.

Most preferably R<sub>3</sub> is hydrogen or methyl, and R<sub>4</sub> is as defined above wherein:


5 X = CH<sub>2</sub>CH<sub>2</sub>

m = 1

n = 1

Z = CH<sub>3</sub>

10 In the preferred embodiment of the invention the multicarbonyl-vinyl containing monomer is acetoacetoxyethyl methacrylate, which has the formula:



### OTHER INGREDIENTS

The polymerizable compositions may additionally contain a variety of other ingredients, as set forth below:

#### 20 Another Ethylenically Unsaturated Monomer


The polymerizable composition preferably contains 5-98%, preferably 10-96%, more preferably 25-95% by weight of the total composition of at least one other ethylenically unsaturated monomer. The ethylenically unsaturated monomer may be mono-, di-, tri-, or polyfunctional as regards the addition-polymerizable ethylenic bonds. A variety of ethylenically unsaturated monomers are suitable, so long as the monomers selected are capable of

25

polymerization directly on the nail surface to yield a polymerized artificial nail structure upon exposure to the appropriate stimuli.

Examples of suitable monofunctional ethylenically unsaturated monomers include those of the formula:

5 I.



10

wherein  $R_1$  is H, a  $C_{1-30}$  straight or branched chain alkyl, aryl, aralkyl;  $R_2$  is a pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the substituents are  $C_{1-30}$  straight or branched chain alkyl, or COOM wherein M is H, a  $C_{1-30}$  straight or branched chain alkyl, pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the substituents are  $C_{1-30}$  straight or branched chain alkyl which may be substituted with one or more hydroxyl groups, or  $[(CH_2)_mO]_nH$  wherein m is 1-20, and n is 1-200.

15

Preferably, the monofunctional ethylenically unsaturated monomer is of Formula I, above, wherein  $R_1$  is H or a  $C_{1-30}$  alkyl, and  $R_2$  is COOM wherein M is a  $C_{1-30}$  straight or branched chain alkyl which may be substituted with one or more hydroxy groups.

20


More preferably,  $R_1$  is H or  $CH_3$ , and  $R_2$  is COOM wherein M is a  $C_{1-10}$  straight or branched chain alkyl which may be substituted with one or more hydroxy groups. In the preferred embodiment of the invention, the monofunctional ethylenically unsaturated monomer is a mixture of monomers of Formula I where in one monomer  $R_1$  is H or  $CH_3$  and  $R_2$  is COOM

where M is a C<sub>1-10</sub> alkyl, and where in the second monomer R<sub>1</sub> is H or CH<sub>3</sub>, and R<sub>2</sub> is COOM  
 where M is a C<sub>1-10</sub> alkyl substituted with one or more hydroxy groups.

In the preferred embodiment of the invention, the monofunctional ethylenically  
 unsaturated monomer comprises a mixture of one or more methacrylate monomers and one or  
 5 more hydroxyalkyl methacrylate monomers, preferably about 50-98.5% of a methacrylate  
 monomer, and 5-20% of a hydroxyalkyl methacrylate monomer. Most preferred is a  
 composition containing 60-98.5% ethyl methacrylate and 7-15% hydroxypropylmethacrylate.

Di-, tri- and polyfunctional monomers, as well as oligomers, of the above monofunctional  
 monomers may also be used in the composition. Such di-, tri-, and polyfunctional monomers are  
 10 generally known as cross-linking monomers because they aid in cross-linking of the monomer  
 composition during and after polymerization. Preferred difunctional monomers include those  
 having the general formula:

II.

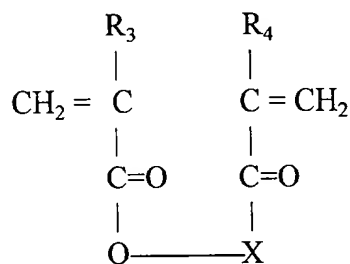

wherein R<sub>3</sub> and R<sub>4</sub> are each independently H, a C<sub>1-30</sub> straight or branched chain alkyl, aryl, or  
 aralkyl; and X is [(CH<sub>2</sub>)<sub>x</sub>O<sub>y</sub>]<sub>z</sub> wherein x is 1-20, and y is 1-20, and z is 1-100. Particularly  
 25 preferred are difunctional acrylates and methacrylates, such as the compound of formula II above  
 wherein R<sub>3</sub> and R<sub>4</sub> are CH<sub>3</sub> and X is [(CH<sub>2</sub>)<sub>x</sub>O<sub>y</sub>]<sub>z</sub> wherein x is 1-4; and y is 1-6; and z is 1-10.

Particularly preferred are difunctional acrylates and methacrylates, such as the compound of formula II above wherein  $R_3$  and  $R_4$  are  $CH_3$  and  $X$  is  $[(CH_2)_xO_y]_z$  wherein  $x$  is 2; and  $y$  is 1, and  $z$  is 4. The polymerizable compositions preferably contain 0.1-25%, preferably 0.5-20%, more preferably 1-15% by weight of a difunctional monomer. Particularly preferred is where the difunctional monomer is an ethylene glycol dimethacrylate. Most preferred is where the difunctional monomer is tetraethylene glycol dimethacrylate.

Trifunctional and polyfunctional monomers are also suitable for use in the polymerizable monomer compositions of the invention. Examples of such monomers include acrylates and methacrylates such as trimethylolpropane trimethacrylate or trimethylolpropane triacrylate. The preferred compositions of the invention contain 0.001-5%, preferably 0.005-4%, more preferably 0.01-3% by weight of a polyfunctional monomer such as trimethylolpropane trimethacrylate ester or trimethylolpropane triacrylate ester.

#### Polymerization Accelerators

The monomeric compositions of the invention may contain 0.001-5%, preferably 0.001-4%, more preferably 0.005-3% by weight of a polymerization accelerator, or catalyst, which is preferably an aromatic or aliphatic tertiary amine. Suitable aliphatic or aromatic tertiary amines include those set forth on pages 1532-1534 of the C.T.F.A. Cosmetic Ingredient Dictionary and Handbook, Seventh Edition, 1997, which is hereby incorporated by reference. Preferred are aromatic tertiary amines such as  $N,N$ -di( $C_{1-6}$ ) alkyl- $p$ -toluidines such as  $N,N$ -dimethyl- $p$ -toluidine,  $N,N$ -diethyl- $p$ -toluidine; or  $N,N$ -di( $C_{1-6}$ ) alkyl anilines such as  $N,N$ -dimethyl aniline. The preferred accelerator is  $N,N$ -dimethyl- $p$ -toluidine.

The amine polymerization accelerator acts as a catalyst in chain extension and/or cross-linking of the monomers in the monomer composition. In the case where the polymerizable composition is polymerized by chemical means in a liquid/powder system, the most commonly used accelerator is an amine, as mentioned above, in combination with an organic peroxide such as benzoyl peroxide. Generally, the amine accelerator is found in the monomer composition and the peroxide in the powdered composition which is mixed with the monomer composition to cause polymerization immediately prior to application of the composition to the nail, as further discussed herein.

#### Plasticizer

The compositions of the invention may contain 0.001-5%, preferably 0.001-4%, more preferably 0.005-3% by weight of a plasticizer. The plasticizer causes the polymerized nail structure to have improved flexibility and reduced brittleness. Suitable plasticizers are esters, low volatility solvents, or non-ionic materials such as nonionic organic surfactants or silicones.


Suitable esters include those having the general structure  $\text{RCO-OR'}$  where  $\text{RCO-}$  represents the carboxylic acid radical and where  $\text{-OR'}$  is the alcohol residue. Preferably R and R' are fatty radicals, having 6 to 30 carbon atoms, and may be saturated or unsaturated. Examples of suitable esters are those set forth on pages 1558 to 1564 of the C.T.F.A. Cosmetic Ingredient Dictionary and Handbook, Seventh Edition, 1997, which is hereby incorporated by reference.

In the preferred compositions of the invention, the plasticizer is an ester of the formula  $\text{RCO-OR'}$  wherein R and R' are each independently a straight or branched chain  $\text{C}_{6-30}$  alkyl. Preferably, R is  $\text{C}_{6-12}$  alkyl, preferably a  $\text{C}_8$  alkyl, and R' is a  $\text{C}_{16-22}$ , preferably  $\text{C}_{18}$  alkyl. The preferred plasticizer is isostearyl isononanoate.

Other suitable plasticizers are low volatility solvents such as paraffinic hydrocarbons, butyrolactone, xylene, methyl isobutyl ketone, and the like. Suitable paraffinic hydrocarbons include isoparaffins having 7 to 14 carbon atoms. Examples of other solvents include those set forth on pages 1670 to 1672 of the C.T.F.A Cosmetic Ingredient Dictionary and Handbook, Seventh Edition, 1997, which is hereby incorporated by reference. Particularly preferred is butyrolactone.

Also suitable as plasticizers are various silicones. Suitable silicones include volatile or non-volatile silicone fluids, silicone resins, and silicone semi-solids or solids.

Volatile silicones are linear or cyclic silicones having a measureable vapor pressure, which is defined as a vapor pressure of at least 2 mm. of mercury at 20° C. Examples of volatile silicones are cyclic silicones having the general formula:



where  $n = 3-7$ .


Also, linear volatile silicones that may be used in the compositions of the invention have the general formula:




where  $n=0-7$ , preferably 0-5.

Suitable water insoluble nonvolatile silicone fluids including polyalkyl siloxanes, polyaryl siloxanes, polyalkylaryl siloxanes, polyether siloxane copolymers, amine-functional silicones, and mixtures thereof. Such silicones have the following general formula:

101112-1.doc

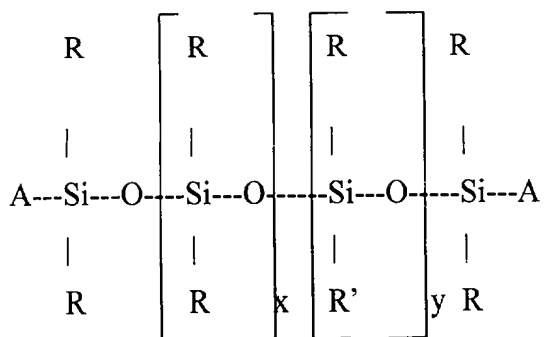

wherein R and R' are each independently alkyl, aryl, or an alkyl substituted with one or more hydroxyl or amino groups, and x and y are each independently 0-100,000, with the proviso that x+y equals at least one and A is siloxy endcap unit. Preferred is where A is methyl, R is methyl, and R' is an C<sub>1-4</sub> alkyl substituted with at least one hydroxyl groups, most preferably a silicone having the formula:

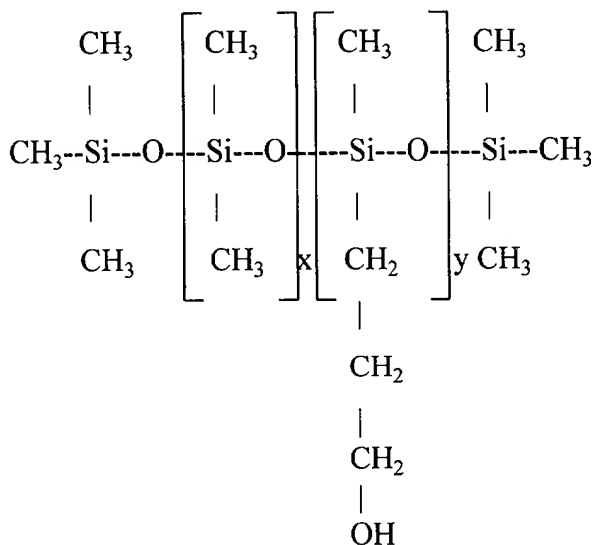

which is known by the CTFA name hydroxypropyldimethicone.



Other compounds known in the art to have a plasticizing effect are also suitable for use as the plasticizer component. Preferred is where the plasticizer component is a mixture of esters, silicones, and solvents.

#### U.V. Absorbers

5           The compositions of the invention may contain one or more U.V. absorbers, which assist in reducing the yellowing which is often seen in artificial nails. The U.V. absorber has the ability to convert incident U.V. radiation into less damaging infrared radiation (heat), or visible light. A recommended amount of U.V. absorber is 0.001-5%, preferably 0.005-4%, more preferably 0.01-3% by weight of the total composition. Suitable U.V. absorbers include hydroxy benzotriazole compounds such as 2-(2-hydroxy-5'-methylphenyl)benzotriazole, in addition to the Benzophenones 1-12, 3-benzylidene camphor, benzyl salicylate, borneolone, bumetrizole, PABA, butyl PABA, butyl methoxydibenzoymethane, cinoxate, DEA-methoxycinnamate, Dibenzoxazoyl naphthalene, digalloyl trioleate, diisopropyl methyl cinnamate, and so on. Preferred are the hydroxy benzotriazole compounds, in particular 2-(2-hydroxy-5'-methylphenyl)benzotriazole.


#### Polymerization Regulators

It may also be desirable to include in the composition one or more compounds which assist in regulating polymerization of the monomer composition. A polymerization regulator assists in preventing the polymerization of the monomer composition from occurring too quickly.

20   Hydroquinone and similar materials are suitable polymerization regulators. Suggested ranges of polymerization regulators are from about 0.0001-5%, preferably 0.001-4%, more preferably 0.005-3% by weight of the total composition.


The preferred polymerizable compositions of the invention comprise:

1-20% of a multicarbonyl-vinyl containing monomer having the formula:




wherein R<sub>3</sub> is H, a C<sub>1-30</sub> straight or branched chain alkyl, aryl, aralkyl; and

R<sub>4</sub> is -A-X-(OC-(CH<sub>2</sub>)<sub>m</sub>-C(=O)-CH<sub>2</sub>)<sub>n</sub>-Z, or



wherein A = -C(=O)-O-, or O-C(=O)-, X = C<sub>1-30</sub> straight or branched chain alkyl, m is 1 to 5, n is 1 to 30, y is 0 to 50; and Z = H or a C<sub>1-30</sub> straight or branched chain alkyl;

25-95% of a monoethylenically unsaturated monofunctional monomer having the general formula:



wherein R<sub>1</sub> is H, a C<sub>1-30</sub> straight or branched chain alkyl, aryl, aralkyl; R<sub>2</sub> is a pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the substituents are C<sub>1-30</sub> straight or branched chain alkyl, or COOM wherein M is H, a C<sub>1-30</sub> straight or branched chain alkyl, pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the

substitutents are  $C_{1-30}$  straight or branched chain alkyl which may be substituted with one or more hydroxyl groups, or  $[(CH_2)_mO]_nH$  wherein m is 1-20, and n is 1-200.

### Polymer Powders

The polymerizable composition of the invention may be polymerized by exposure to radiant energy, such as heat or U.V. light. If so, the composition is applied to nails and shaped in the desired configuration. The coated nails are exposed to radiant energy, and polymerization occurs. On the other hand, the most common method is for the polymerizable composition to be mixed with a powder comprised of polymer powders in what is referred to as the "powder/liquid" method of polymerization. Suitable polymer powders are preferably polymers or copolymers which contain at least some ethylenic unsaturation to permit cross-linking. The polymer powder mixture is generally comprised of a linear particulate chain-extended or cross-linked acrylate or methacrylate polymer, which may be in the random or block copolymer form. Most typically the acrylate or methacrylate polymer is ethyl or methyl methacrylate or ethyl or methyl acrylate, or a combination of one or more of these polymers. Most often a copolymer of ethyl and methyl methacrylate is used. The polymer powder composition may also contain a polymerization accelerator, or catalyst, which is designed to work in conjunction with the accelerator found in the polymerizable composition. Most preferred is a peroxide, such as benzoyl peroxide. The polymer powder may also contain other ingredients such as titanium dioxide and other dyes and/or pigments.

In the preferred embodiment of the invention, polymerizable composition is polymerized using the "powder/liquid" method. Immediately prior to use, an appropriate amount of the polymerizable composition is poured into a dish or other appropriate vessel. A brush or other

shaping tool is dipped into the composition to form a small bead on the tip of the tool. This bead is then dipped into the Polymer powder mixture, which is in a separate dish. Upon dipping the bead of liquid monomer on the brush into the Polymer powder material, a doughy, adherent, agglomerated mass of particles is formed at the tip of the shaping tool. Alternatively, the powder can be slurried in the liquid to obtain a doughy mass, and the shaping tool is dipped into the dough. Generally a ratio of 0.2 to 1.3 parts of polymer powder to 1 part of the liquid monomer composition will provide suitable polymerization. The liquid monomer softens and partially dissolves the powder. The tip of the shaping tool, with its load of doughy material is then used to sculpt a new nail shape on the nail surface. The peroxide in the powder and the amine in the liquid monomer act together to catalyze polymerization of the monomer composition to result in an artificial nail structure, which is then shaped and polished as desired. In order for the polymerizable composition to exhibit a desirable workability, the composition should be such that when a 1 to 0.5, respectively, mixture of the polymerizable composition and the above mentioned powdered catalyst are mixed and stored at 15° C., the mixture should gel to a viscosity of 100,000 centipoise in 400 to 1400 seconds, preferably 600 to 1200 second, most preferably 800 to 1000 seconds.

The above method describes use of the polymerizable composition when polymerization by chemical means is used. However, as previously noted, the polymerizable composition may be polymerized by other methods, such as by exposure to UV light, heat, and so on, in which case it may not be necessary to use the powdered mixture to initiate polymerization.

#### The Artificial Nail Structure

The invention is also directed to an artificial nail structure having a thickness of 10-60, preferably 20-50, more preferably 25-45 mils, and a modulus of elasticity of about 550-800 N/m<sup>2</sup>, comprising a copolymer of at least one ethylenically unsaturated monomer and a multicarbonyl vinyl-containing monomer.

5 The stiffness is as measured in Newtons per meter as defined by the ASTM test method for the three point bend test as described in ATSM Method D 790-86 as mentioned above.

Preferably the artificial nail structure comprises a copolymer of an ethylenically unsaturated monomer of Formula I, above, and a multicarbonyl-vinyl containing monomer having the general formula set forth above. More preferably the artificial nail structure comprises a copolymer of one or more monofunctional ethylenically unsaturated monomers, one or more difunctional ethylenically unsaturated monomers, and one or more tri- or polyfunctional ethylenically unsaturated monomers and the di-carbonyl vinyl containing monomer. Most preferably, the artificial nail structure comprises a copolymer of ethyl methacrylate, methyl methacrylate, hydroxpropyl methacrylate, acetoacetoxyethyl methacrylate, tetraethylene glycol dimethacrylate, and trimethylolpropane trimethacrylate ester. The artificial nail structure of the invention may also be made in a mold, and attached to the fingernail by adhesive or other similar means.

#### A Method For Reducing Delamination

20 The invention also comprises a method for reducing, ameliorating, or eliminating delamination of an artificial nail structure from the natural nail surface, wherein said artificial nail structure is obtained by polymerizing on the natural nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective

amount of at least one multicarbonyl-vinyl containing monomer. Preferably, the multicarbonyl-vinyl containing monomer is as mentioned herein, and the polymerizable monomer composition comprises at least one ethylenically unsaturated monomer, preferably of Formula I. The amounts which will reduce delamination range from about 1-15% by weight of the total composition of the polymerizable composition. Delamination is inversely related to adhesion. In other words, the greater the adhesion, the less the tendency for delamination.

#### A Method For Improving Adhesion

The invention also comprises a method for improving adhesion of an artificial nail structure to the nail surface, wherein the artificial nail structure is to be applied by polymerizing on the nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective amount of at least one multicarbonyl-vinyl containing monomer. The multicarbonyl-vinyl containing monomer and other components of the composition are as set forth herein. The resulting artificial nail structure exhibits improved adhesion to the nail surface when compared to nail compositions which do not contain the multicarbonyl-vinyl containing monomer.

#### A Method For Reducing Premature Gelation

The invention also comprises a method for reducing premature gelation of a liquid monomer composition containing at least one ethylenically unsaturated monomer, comprising adding to said monomer composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

The preferred ethylenically unsaturated monomers and multicarbonyl-vinyl containing monomers are as mentioned herein. The addition of the multicarbonyl-vinyl containing

monomer considerably improves gelation time. Generally, polymerizable compositions containing an effective amount of the multicarbonyl-vinyl containing monomer will remain ungelled from 1 to 20, preferably 1-10 days longer than similar compositions which do not contain the multicarbonyl-vinyl containing monomer, when maintained at 45° C.

5           The invention will be further described in connection with the following examples, which are set forth for the purposes of illustration only.

#### EXAMPLE 1

An artificial nail composition was made as follows:

	<u>w/w%</u>
10 Ethyl methacrylate	74.0 (monomer)
Hydroxypropyl methacrylate	9.798 (monomer)
Acetoacetoxy ethylmethacrylate	5.0 (AAEMA monomer)
Tetraethylene glycol dimethacrylate	9.0 (cross-linkable monomer)
N,N-dimethyl-p-toluidine	1.0 (accelerator)
15 2-(2'-hydroxy-5'-methylphenyl)benzotriazole	0.5 (U.V. absorber)
Isostearyl Isononanoate	0.2 (plasticizer)
Hydroxypropyl dimethicone	0.2 (plasticizer)
Butyrolactone	0.2 (plasticizer)
Trimethylolpropane trimethacrylate ester	0.1 (cross-linkable monomer)
20 D&C violet #2	0.001 (colorant)
Hydroquinone	0.001 (polymerization regulator)

The above mentioned composition was made by combining the ingredients in the order listed and mixing well. The composition had the consistency of a thick, viscous, liquid. The  
25 composition was stored in a brown glass jar.

#### EXAMPLE 2

Polymerizable compositions in accordance with the invention were tested for pre-mature gelation. Compositions were prepared as follows:

w/w%

	1	2	3	4
Ethyl methacrylate	79.	72.	74.	78.75
Hydroxypropyl methacrylate	9.798	9.798	9.798	9.798
Tetraethylene glycol dimethacrylate	9.0	9.0	9.0	9.0
5 Acetoacetoxyethyl methacrylate	-----	7.0	5.0	0.25
N,N-dimethyl-p-toluidine	1.0	1.0	1.0	1.0
2-(2'-hydroxy-5'-methylphenyl) benzotriazole	0.50	0.50	0.50	0.50
10 Trimethylolpropane trimeth- acrylate ester	0.10	0.10	0.10	0.10
Butyrolactone	0.20	0.20	0.20	0.20
Isostearyl isononanoate	0.20	0.20	0.20	0.20
Hydroxypropyl dimethicone	0.20	0.20	0.20	0.20
D&C Violet #2	0.001	0.001	0.001	0.001
15 Hydroquinone	0.001	0.001	0.001	0.001

w/w%

	5	6
20 Ethyl methacrylate	78.5	78.
Hydroxypropyl methacrylate	9.798	9.798
Tetraethylene glycol dimethacrylate	9.0	9.0
Acetoacetoxyethyl methacrylate	0.50	1.0
25 N,N-dimethyl-p-toluidine	1.0	1.0
2-(2'-hydroxy-5'-methylphenyl) benzotriazole	0.50	0.50
Trimethylolpropane trimeth- acrylate ester	0.10	0.10
30 Butyrolactone	0.20	0.20
Isostearyl isononanoate	0.20	0.20
Hydroxypropyl dimethicone	0.20	0.20
D&C Violet #2	0.001	0.001
35 Hydroquinone	0.001	0.001

Compositions 1-6 were tested for stability by pouring each sample in 20 mL. borosilicate glass scintillation vials and placing in a 45 C° oven. The samples were checked daily, and the number of days before the composition completely gelled in the container was recorded. This



test is a reliable indicator of the tendency of monomer compositions to exhibit premature gelation. The results are as follows:

	Sample #	Vial	No. Days	Sample #	Vial	No. Days			
5	1	(a)	5	4	(a)	6			
		(b)	5		(b)	7			
		(c)	5		(c)	8			
		(d)	6		(d)	9			
		(e)	6		5	(a)	6		
		(f)	6			(b)	7.5		
10		(g)	7		(c)	8			
		(h)	8		(d)	10-11			
		(i)	8		6	(a)	8.5		
		(j)	8			(b)	9		
		15	2			(a)	10	(c)	12
						(b)	11	(d)	12
(c)	11								
(d)	12								
(e)	13.5								
(f)	9								
20		(g)	9						
		(h)	12						
		(i)	12						
		(j)	12.5						
		25	3		(a)	19			
					(b)	19			
(c)	19								
(d)	19								
(e)	19								
(f)	15								
30			(g)	18					
			(h)	18					
			(I)	18					
			(j)	18					
			35						

Sample 1, which did not contain the multicarbonyl-vinyl containing monomer gelled in about 5 to 8 days at 45° C. Samples 2-6, which contained varying amounts of the multicarbonyl-vinyl containing monomer, in particular acetoacetoxyethyl methacrylate, gelled in

6 to 19 days at 45° C. Samples 2 and 3, containing 7% and 5% acetoacetoxyethyl methacrylate respectively, exhibited gel times ranging from 9 to 19 days.

### EXAMPLE 3

Adhesion of various artificial nails to the nail surface was measured by coating a keratinous substrate with a 25 mil. coating of the composition. A Romulus III Hesiometer was used to cut through the coating on the keratinous substrate, and the force required to cause the coating to become disengaged from the substrate was recorded in joules per square meter (joules/m<sup>2</sup>). The results are as follows:

Product	No Primer	Primer*
EXAMPLE 2 (1)	387.9	534
EXAMPLE 2 (2)	811	590
EXAMPLE 2 (3)	593	542
Tammy Taylor	239	285
OPI L-3000		336
Kismet	149.4	203
Premium		276
Polymax/OPI	144.7	195
Choice		330
Cosmic		514
Galaxy		436
Simplicite		250
European Touch		320

\* The primer composition containing 100% by weight methacrylic acid was applied to nails prior to applying the liquid monomer composition.

The results show that the polymerizable compositions of the invention show improved adhesion to keratin either with or without a prior application of primer composition to the nail.

### EXAMPLE 4

Compositions were prepared as follows:

		<u>w/w%</u>			
		#1	#2	#3	#4
	Acetoacetoxyethylmethacrylate	98	96	97.5	96
	Dimethyl-p-toluidine	1	2	1.5	1
5	Tetraethylene glycol dimethacrylate	0	0	0	3
	UV-9*	1	2	1	0
	Violet dye	0.0002	0.0004	0	0

\* Ultraviolet 9, a U.V. Absorber.

The above ingredients were mixed together. One part of the composition was combined with one part of a 100% poly(ethylmethacrylate) homopolymer and mixed. The compositions were applied to nails and shaped to form artificial nail structures.

#### EXAMPLE 5

Compositions (2) and (3) of Example 2 were tested on panelists. Trained nail technicians applied Composition (2) to 14 panelists, and Composition (3) to 13 panelists. The technicians applied the material in the usual manner, using the liquid/powder method of polymerization.

The technicians were then asked to answer a series of questions as follows:

1. How is the overall retention of the artificial nail? (retention, or adhesion, is how well the artificial nail adheres to the nail surface)

% Panelists who said:	(2)	(3)
Very High	64.3	53.8
High	14.3	30.8
25 Medium	7.1	0
Low	7.1	0
Very Low	0	0
No Answer	7.1	15.4

2. Do any of your clients have separation at the free edge? (Refers to separation of the artificial nail from the natural nail surface at the nail tip, also referred to as delamination)

% Panelists who said:		(2)	(3)
	Yes	7.1	0
	No	71.4	84.6
5	No Answer	21.4	15.4

3. Did any of your clients have lifting? If so where? (Refers to lifting of the artificial nail from the nail surface)

% Panelists who said:		(2)	(3)
10	None yet	35.7	84.6
	Other	50.0	15.4
	No Answer	14.3	0

4. Did any of your clients experience breakage? (refers to breaking of the artificial nail)


% Panelists who said:		(2)	(3)
	No	57.1	69.2
	Other	35.7	30.8

While the invention has been described in connection with the preferred embodiment, it is not intended to limit the scope of the invention to the particular form set forth but, on the contrary, it is intended to cover such alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

**WE CLAIM:**


1. In a liquid artificial nail composition comprised of one or more addition-polymerizable, ethylenically unsaturated monomers, the improvement wherein the composition also contains a monoethylenically unsaturated vinyl monomer that contains two or more carbonyl groups.

2. The composition of claim 1 wherein the monoethylenically unsaturated vinyl monomer that contains two or more carbonyl groups is of the formula:



wherein  $R_3$  is H, a  $C_{1-30}$  straight or branched chain alkyl, aryl, aralkyl; and


$R_4$  is  $-A-X-(OC-(CH_2)_m-C(=O)CH_2)_n-Z$ , or



wherein  $A = -C(=O)-O-$ , or  $O-C(=O)-$ ,  $X = C_{1-30}$  straight or branched chain alkyl,  $m$  is 1 to 5,  $n$  is 1 to 30,  $y$  is 0 to 50; and  $Z = H$  or a  $C_{1-30}$  straight or branched chain alkyl.

3. The composition of claim 2 wherein  $R_3$  is H or a  $C_{1-8}$  alkyl, and  $R_4$  is

$-A-X-(OC-(CH_2)_m-C(=O)CH_2)_n-Z$ , wherein



X = C<sub>1-5</sub> alkylene

m = 1-5,

n = 1-5, and

Z = C<sub>1-10</sub> straight chain alkyl.

- 5 4. The composition of claim 3 wherein R<sub>3</sub> is hydrogen or methyl, and:

X = CH<sub>2</sub>CH<sub>2</sub>

m = 1

n = 1

Z = CH<sub>3</sub>


10  
15  
20  
25

5. The composition of claim 4 wherein multicarbonyl-vinyl containing monomer is acetoacetoxyethyl methacrylate.

6. The composition of claim 2 additionally comprising at least one other ethylenically unsaturated monomer.

7. The composition of claim 6 wherein the other ethylenically unsaturated monomer comprises at least one monofunctional ethylenically unsaturated monomer.

8. The composition of claim 7 wherein the monofunctional ethylenically unsaturated monomer is of the formula (Formula I):



wherein R<sub>1</sub> is H, a C<sub>1-30</sub> straight or branched chain alkyl, aryl, aralkyl; R<sub>2</sub> is a pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the substituents are C<sub>1-30</sub>

straight or branched chain alkyl, or COOM wherein M is H, a C<sub>1-30</sub> straight or branched chain alkyl, pyrrolidone, or a substituted or unsubstituted aromatic, alicyclic, or bicyclic ring where the substituents are C<sub>1-30</sub> straight or branched chain alkyl which may be substituted with one or more hydroxyl groups, or [(CH<sub>2</sub>)<sub>m</sub>O]<sub>n</sub>H wherein m is 1-20, and n is 1-200.

5 9. The composition of claim 8 wherein R<sub>1</sub> is H or a C<sub>1-30</sub> alkyl, and R<sub>2</sub> is COOM wherein M is a C<sub>1-30</sub> straight or branched chain alkyl which may be substituted with one or more hydroxy groups.


10. The composition of claim 9 wherein R<sub>1</sub> is H or CH<sub>3</sub>, and R<sub>2</sub> is COOM wherein M is a C<sub>1-10</sub> straight or branched chain alkyl which may be substituted with one or more hydroxy groups.

10 11. The composition of claim 10 wherein the other monofunctional ethylenically unsaturated monomer is a mixture of monomers of Formula I where in one monomer R<sub>1</sub> is H or CH<sub>3</sub> and R<sub>2</sub> is COOM where M is a C<sub>1-10</sub> alkyl, and where in the second monomer R<sub>1</sub> is H or CH<sub>3</sub>, and R<sub>2</sub> is COOM where M is a C<sub>1-10</sub> alkyl substituted with one or more hydroxy groups.

15 12. The composition of claim 11 wherein the monofunctional ethylenically unsaturated monomer is a mixture of ethyl methacrylate and hydroxypropyl methacrylate.

13. The composition of claim 7 wherein the other ethylenically unsaturated monomer additionally comprises at least one difunctional ethylenically unsaturated monomer.

14. The composition of claim 13 wherein the difunctional monomer is of the formula:

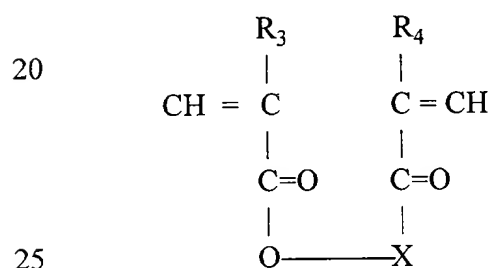

wherein  $R_3$  and  $R_4$  are each independently H, a  $C_{1-30}$  straight or branched chain alkyl, aryl, or aralkyl; and X is  $[(CH_2)_xO_y]_z$  wherein x is 1-20, and y is 0-200, and z is 1-100.

15. The composition of claim 14 wherein the  $R_3$  and  $R_4$  are  $CH_3$  and X is  $[(CH_2)_xO_y]_z$  wherein x is 1-4; and y is 1-6, and z is 1-10.

16. The composition of claim 15 wherein x is 2, y is 1, and z is 4, and the compound is tetraethylene glycol dimethacrylate.

17. The composition of claim 7 additionally containing at least one tri- or polyfunctional ethylenically unsaturated monomer.

18. The composition of claim 17 wherein the tri- or polyfunctional ethylenically unsaturated monomer is trimethylolpropane trimethacrylate ester.

19. The composition of claim 7 additionally comprising 0.001-5% by weight of the total composition of a polymerization accelerator.

20. The composition of claim 19 wherein the polymerization accelerator is an aromatic or aliphatic tertiary amine.

21. The composition of claim 7 additionally comprising 0.001-5% of a plasticizer.

22. The composition of claim 21 wherein the plasticizer is an ester, a solvent, a silicone, or mixtures thereof.

23. The composition of claim 7 additionally comprising 0.001-5% by weight of the total composition of a U.V. absorber.

25. In a liquid artificial nail composition comprised of one or more esters of acrylic or methacrylic acid and an aliphatic alcohol or ether-alcohol, the improvement wherein the



composition also contains a monoethylenically unsaturated vinyl monomer that contains two or more carbonyl groups.

26. A polymerized artificial nail structure having a thickness of about 10-60 mils, and a modulus of elasticity of about  $550\text{-}800\text{ N/m}^2$ , comprising a copolymer of at least one

ethylenically unsaturated monomer and a multicarbonyl vinyl-containing monomer.

27. A method for reducing, ameliorating, or eliminating delamination of an artificial nail structure from the natural nail surface, wherein said artificial nail structure is obtained by polymerizing on the natural nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective amount of at least one

multicarbonyl-vinyl containing monomer.

28. A method for improving adhesion of an artificial nail structure to the nail surface, wherein the artificial nail structure has been applied by polymerizing on the nail surface a polymerizable monomer composition, comprising adding to said polymerizable monomer composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

29. A method for reducing premature gelation of a liquid monomer composition containing at least one ethylenically unsaturated monomer, comprising adding to said composition an effective amount of at least one multicarbonyl-vinyl containing monomer.

30. A method for applying an artificial nail to a nail surface comprising applying to said nail surface a polymerizable composition containing at least one monoethylenically unsaturated vinyl

monomer that contains two or more carbonyl groups.

## ABSTRACT OF DISCLOSURE

The invention comprises a polymerizable monomer composition for application to the nail surface and polymerization thereon to yield an artificial nail structure, comprising at least one multicarbonyl-vinyl containing monomer; a polymerized artificial nail structure having a thickness of about 10-60 mils, and a modulus of elasticity of about 550-800 N/m<sup>2</sup>, comprising a copolymer of at least one ethylenically unsaturated monomer and a multicarbonyl vinyl-containing monomer; a method for reducing, ameliorating, or eliminating delamination of an artificial nail structure from the natural nail surface; a method for improving adhesion of an artificial nail structure to the nail surface; and a method for reducing premature gelation of a liquid monomer composition.

DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

As a below named inventors, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **Artificial Nail Compositions and Related Methods** the specification of which:

(Check One)    ☒ is attached hereto.  
                  ☐ was filed on  
                  as Application Serial No.  
                  and was amended on \_\_\_\_\_  
                  (if applicable).

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: None.

We hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter in each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application: U.S. Patent Application Serial No. 918,134, filed August 27, 1997.

As named inventors, we hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Julie Blackburn, PTO Reg. No. 32,370

Correspondence should be directed to:

Julie Blackburn  
Revlon Consumer Products Corporation  
Law Department  
625 Madison Avenue  
New York, NY 10022

Telephone calls should be directed to:

Julie Blackburn

(212) 527-5531

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first or sole inventor: Douglas Dean Schoon

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Laguna Miguel, California

Citizenship USA

Post Office Address 29932 Morongo Place

Laguna Miguel, California 92677

Full name of second inventor: George Frederick Cowperthwaite

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence East Fallowfield, Pennsylvania

Citizenship USA

Post Office Address 2210 Wetchester Road

East Fallowfield, Pennsylvania 19320

Full name of third inventor: Allen David Johnston

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Westchester, Pennsylvania

Citizenship USA

Post Office Address 1206 Karen Lane

Westchester, Pennsylvania 19380

Full name of fourth inventor: Susan C. Sheariss

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Swedesboro, New Jersey

Citizenship USA

Post Office Address 222 Burgundy Drive

Swedesboro, New Jersey 08884

Full name of fifth inventor: Jennifer Ellen Moore

Inventor's Signature \_\_\_\_\_

Date \_\_\_\_\_

Residence La Jolla, California


Citizenship USA

Post Office Address 3745A Miramar Street

La Jolla, California 92037

# United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

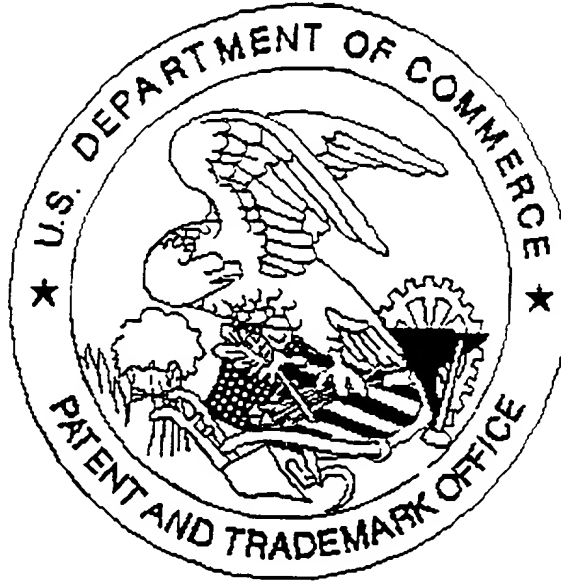

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: NO DRAWINGS